




TECHNICAL DRAWING

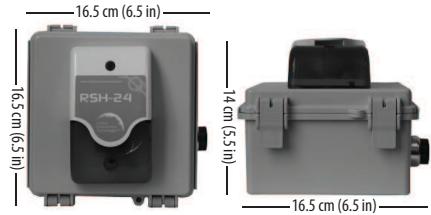

TECHNICAL SPECIFICATIONS

MECHANICAL

Enclosure	ABS with hinged lid
Size	165 mm x 165 mm x 140 mm (6.5 in x 6.5 in x 5.5 in)
Lens Colour	Red
Tone	1 tone
Flash Frequency	140 to 180 times per minute
Sound Level	Rated 99 dB @ 3 m (10 ft) (VAC) 97 dB @ 3 m (10 ft) (VDC)
7 Timer Ranges (off duration)	1s - 10s - 1 min - 10 min - 1 hr - 10 hrs - 100 hrs


ELECTRICAL

Power Requirements	24 VDC / VAC
Current Draw	145 mA (typical), 175 mA (max)

ENVIRONMENTAL

Operating Temperature	-30°C to 60°C (-22°F to 140°F)
-----------------------	--------------------------------

WIRING

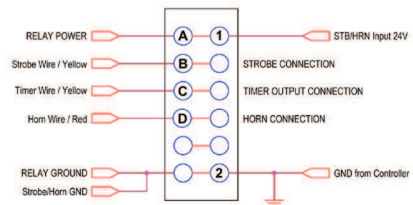

- 1 Alarm Output from Controller
- 2 Ground Connection from Controller

Jumper Positions:

- A/B Strobe says activated on Alarm (Default)
- B/C Strobe under Timer Control
- A/D Horn stays activated on Alarm
- C/D Horn under Timer Control (Default)

The RSH-TMR is a remote strobe and horn combo that comes with a mounting enclosure and combines two alarm features, a visual and an audible into one compact device. The strobe and siren can be configured to activate together or each can activate separately from each other. It includes a built in timer that can be set for a predetermined amount of time, that when a gas reading level triggers the strobe/horn a press of the shut off switch will silence the alarm for that amount of time. The timer / shut off switch can be made to silence the horn, turn off the strobe or control both at the same time by changing jumper positions. It is powered by 24 VDC / VAC.

May be used for light industrial, commercial and institutional applications for timing, paging and alarm signaling, including equipment malfunction alerts, safety and security warnings. Ideal for refrigeration applications to meet B52 code requirements.

KEY FEATURES

- » Two alarm features combined into one device
- » Seven timer setting ranges
- » Easy press manual shut off switch
- » Light weight, weather and corrosion resistant
- » Independent settings for horn, strobe or horn and strobe together
- » Surface mount and 1/2" NPT conduit mount

APPLICATIONS

- » Refrigeration Plants
- » Equipment/ Machinery Rooms
- » Manufacturing Plants
- » Food Processing Plants
- » Power Generation Plants
- » Pools, Arenas, Hotels
- » ... and many more

PRODUCT CODES

Remote Strobe / Horn combo with timer, mounted RSH-TMR