

INSTALLER SUPPLIED LOW VOLTAGE TERMINALS (24V NOMINAL)


SELECT LOW or LINE VOLTAGE INCOMING POWER TO DCC, NOT BOTH

RELAY CONTROL WIRING TERMINALS. CONNECT TO COM & N/C. DO NOT USE SOLID CORE WIRE


INSTALLER SUPPLIED OPTIONAL LINE VOLTAGE (90-240 VAC, 50-60 HZ)

NO INTERNAL SENSOR

INTERNAL SS REFRIGERANT SENSOR (R22, R134A, R402A, R404A, R407C, R410A, R422D or R507A)

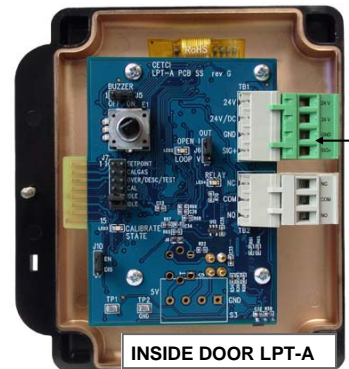

LPT-A 3-WIRE ANALOG TRANSMITTER WIRED TO DCC DUAL CHANNEL CONTROLLER



THIS DCC-B-RT / LPT-A WITH REFRIGERANT SENSOR COMBINATION MAKES A ONE CHANNEL GAS DETECTION SYSTEM MONITORING SPECIFIED REFRIGERANT GAS IN A CHILLER ROOM.

CRITICAL ENVIRONMENT TECHNOLOGIES CANADA INC.
www.critical-environment.com
DCC-B-RT C/W LPT-A SS BOARD WIRING CONNECTION PHOTO DRAWING
REV-A January 21, 2016