


INSTALLER SUPPLIED LOW VOLTAGE TERMINALS (24V NOMINAL). SELECT LOW or LINE VOLTAGE FOR INCOMING POWER TO DCC, NOT BOTH.

RELAY CONTROL WIRING TERMINALS. CONNECT TO COM & N/C. DO NOT USE SOLID CORE WIRE.

INSTALLER SUPPLIED OPTIONAL LINE VOLTAGE (90-240 VAC, 50-60 HZ)

NO INTERNAL SENSOR

AST-IS18 WITH CO2 SENSOR

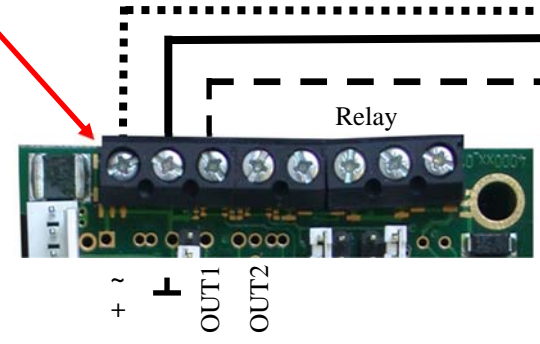

AST-IS18 3-WIRE ANALOG TRANSMITTER WIRED TO DCC DUAL CHANNEL CONTROLLER

THIS DCC-B-RT / AST-IS18 COMBINATION MAKES A ONE CHANNEL DETECTION SYSTEM MONITORING WITH AN INFRARED CO2 SENSOR (0 - 4 % VOL)

CRITICAL ENVIRONMENT TECHNOLOGIES CANADA INC.
www.critical-environment.com

DCC-B-RT C/W AST-IS18
WIRING CONNECTION PHOTO DRAWING
REV-A March 17, 2016